

The Philips logo is displayed in blue capital letters on a white background.

Horticulture  
LED Solutions

GreenPower LED  
toplighting compact



# The easy switch from HPS to LED toplighting


As a grower, you are probably familiar with the benefits of using LED lighting in greenhouses. However, the potentially high upfront investment in LED lighting may have held you back, especially if it meant building a new lighting set-up. That is no longer an issue with the new Philips GreenPower LED toplighting compact. It allows you to easily switch from HPS to LED lighting, using your existing HPS set-up and trellis construction. The high light output of up to 1800  $\mu\text{mol/s}$  and high efficacy of up to 3.0  $\mu\text{mol/J}$  help you effectively optimize crop growth, enhance crop quality and cut operational costs.

**The capabilities of the GreenPower LED toplighting compact bring benefits to growers in many different segments:**

- Tomatoes, cucumbers, lettuce, strawberries and other fruits and vegetables
- Roses, chrysanthemums, alstroemeria and other flowers
- Medicinal cannabis

## Key benefits

- Easy 1-to-1 HPS to LED replacement
- Plug and play design saves time and money on installation
- Produces same light output as 1000 W HPS, but consumes 40% less power
- Wide beam optics provide optimal light distribution
- Can be combined with the GrowWise Control System

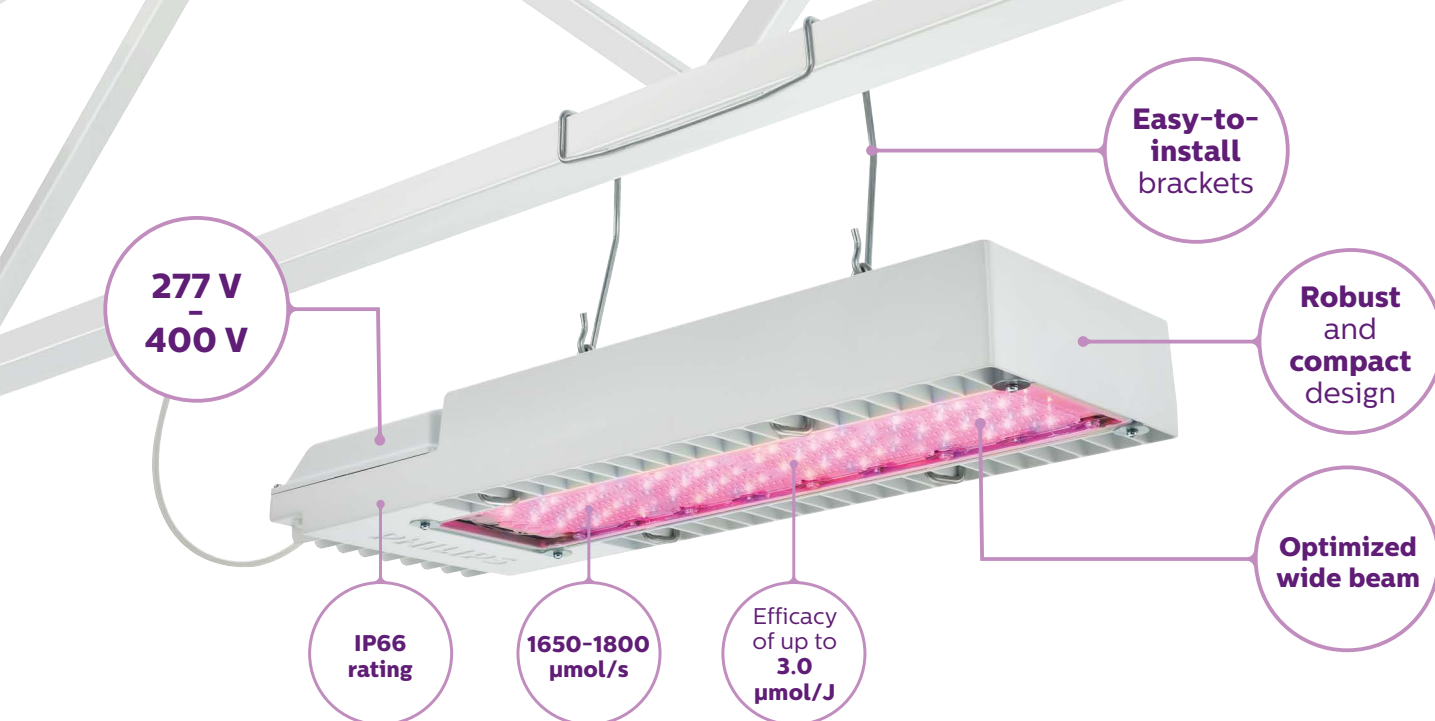

### More light, less heat, better control

Compared to a 1000 W HPS luminaire, the Philips GreenPower LED toplighting compact produces the same amount of light, while consuming 40% less power. The passively cooled module produces much less radiant heat, putting you in control over your greenhouse climate. The new module fits seamlessly in existing HPS connections and trellis constructions, even between sprinklers, so you can easily switch to full LED toplighting or create a hybrid LED and HPS lighting system on your current set-up. The compact, white housing intercepts little sunlight and comes with an IP66 ingress protection rating. On top of all

this, the toplighting compact has optimized wide beam optics, providing excellent light distribution in most greenhouse configurations, including high wire-crops.

### GrowWise Control System enables dimming

The dimmable version of the GreenPower LED toplighting compact can be connected with the GrowWise Control System, allowing growers to dim the lighting to mimic the dusk to dawn interval and enhance results for specific crops. The GrowWise Control System can be used stand-alone or can be controlled via your climate computer.

### Product specifications

Spectral version		Deep Red/Blue types (DR/B)				Deep Red/White types (DR/W)				Deep Red/White/Far Red types (DR/W/FR) <sup>1</sup>			
Full spectral code		LB				MB				FR1_LB		FR4_RSE	
Type		Standard	Dimmable	Standard	Dimmable	Standard	Dimmable	Standard	Dimmable	Standard	Dimmable	Standard	Dimmable
Typical photon flux	μmol/s	1800	180-1800	1800	180-1800	1800	180-1800	1650	165-1650	1650	165-1650	1650	165-1650
Power consumption	W	600	49-600	620	53-620	630	54-630	590	51-590	590	51-590	590	51-590
Efficacy	μmol/J	3.0	3.0	2.9	2.9	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8

**Note:** For product availability of dimmable versions please consult your regional Key Account Manager.

Dimensions	cm	Length: 72	Width: 24	Height: 9
Weight	kg	10.5 (incl. module brackets)		
Power factor		0,98		
Total Harmonic Distortion	%	< 15		
Rated Average Lifetime <sup>2</sup>	hrs	36.000 L90		
Cooling		Passively cooled		
Approval marks		CE, ENEC, RoHS, UL/CSA, RCM		
Connector		Wieland RST20i3 Green		
Warranty		3 years		

#### Legend

<b>DR</b> = Deep Red	<b>LB</b> = Low Blue
<b>B</b> = Blue	<b>MB</b> = Medium Blue
<b>W</b> = White	<b>RSE</b> = Rose Module
<b>FR</b> = Far Red	

#### Notes

<sup>1</sup> The published value represents the total photon flux from 400-800nm

<sup>2</sup> Lifetime and maintenance values are given at an ambient temperature of 25°C / 77°F. All measured lifetimes are industry standard measurements indicating average length of operation and not a performance claim specific to any individual product.



© 2019 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

Document order number: 4422 944 09602 A  
06/2019 | Data subject to change

For more information about Philips Horticulture LED Solutions visit:  
[www.philips.com/horti](http://www.philips.com/horti)

Write us an e-mail:  
[horti.info@signify.com](mailto:horti.info@signify.com)

Or tweet us:  
[@PhilipsHorti](https://twitter.com/PhilipsHorti)